


TECHNICAL FORM

MANUFACTURER	LADRILLOS MORA S.L
MADE IN:	ILLESCAS
PRODUCT DESCRIPTION:	HD CLINKER CLAY MASONRY R-40 238 x 112 x HEIGHT
HEIGHTS (mm):	48 52 72
BRAND NAME:	CENIZA
MASS COLORATION:	NO



PIECE SKETCH

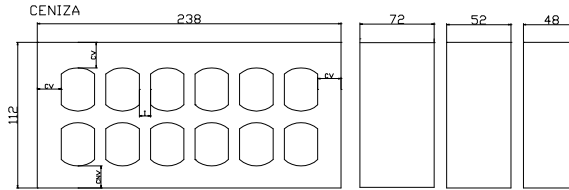

TECHNICAL CHARACTERISTICS

Characteristic		Test method	Manufacturer ensured values	required values	
Appearance and structure	exfoliations / stratifications	Visual	None		
	cracked units		≤ 1 cracked piece		
	chip units		≤ 1 piece with d.i.m. between 7 and 15 mm	≤ 1 piece with d.i.m. between 7 and 15 mm	
Dimensional tolerances (mm)	Mean value	UNE-EN 772-16	0 pieces with m.i.d. > 15 mm.		
			length (l)	± 4	± 4
			width (a)	± 3	± 3
	Range		height (h)	0,25 x h½	máx de (0,25 x h½) ó 2
			length (l)	± 5	± 5
			width (a)	± 3	± 3
Wall thickness (mm)	protected face shells	0,3 x h½	0,3 x h½		
	webs	≥ 15,0	≥ 15,0		
	webs	≥ 10,0	≥ 10,0		
Plane parallelism of bed faces (mm)			≥ 5,0	≥ 5,0	
Flatness of bed faces (mm)	Diagonals	UNE-EN 772-20	≤ 2,0		
			l > 300 mm	N/A	N/A
			300 ≥ l ≥ 250 mm	≤ 3	≤ 3
Percentage of voids (%)	Declared value (%)	UNE-EN 772-3	≤ 2	≤ 2	
			Tolerance (%)	≤ 45	≤ 45
Volume of the largest voids (%)		UNE-EN 772-9	(- 10% ; + 0%)	(- 10% ; + 0%)	
Combined thickness of webs and shells (%)		UNE-EN 772-16	≤ 12,5	≤ 12,5	
Water absorption in external elements (%)		Annex C UNE-EN 771-1	≥ 20	≥ 20	
Damp proof courses (%)		UNE-EN 772-7	≤ 6	≤ 6	
Initial rate of water absorption (Kg/(m² x min))		UNE-EN 772-11	N/A	N/A	
Characteristic normalized compressive strength (N/mm²)		UNE-EN 772-1	≥ 40	≥ 40	
Density	Bearing face: Bed		2.300	2.300	
	Gross dry (Kg/m³)		1.300	1.300	
	Net dry (Kg/m³)		± 10	± 10	
Tolerance (%)					
Weight (g)	Reduction for density	NO	Annex D RP 34.01	Minimum value ensured per height: 1380-1490-2065	
Efflorescences		UNE 67029 EX	NO efflorescence	Slightly efflorescence	
Durability (Freeze/thaw)		UNE 67028 EX	> 100 cycles	> 100 cycles	
Thermal properties (Method)		Method CTE	Test carried out in cold store with forced ventilation		
λ piece (W/m x k)			Declared value from Method applied: fixed value		
R wall (m² x k/w)			0,36		
Water vapour permeability - μ		Annex A UNE-EN 1745	0,18-0,18-0,18	50/100	
Content of active soluble salts		UNE-EN 772-5	S2	S2	
Moisture movement (mm/m)		UNE 67036	≤ 0,50	≤ 0,50	
Fire reaction (% organic materials < 1%)		UNE-EN 13501-1	CLASS A1	CLASS A1	
Bond strength (N/mm²)		Annex C UNE-EN 998-2	≥ 0,30	≥ 0,3	
Surface colours		Annex D RP 34.01	The piece is manufactured with or without superficial coloration		
Water repellent treatment			NO		
Accessory units			YES		
Remarks		Items will be manufactured with different surface coloration, comprising primary colours gamma and their possible combinations. Accessory units can be manufactured: rounds, corners, bricks, etc.			

Stamps and signature: _____
 Details from the construction where it's placed the material named in this technical form: _____
 (For the final qualification, this technical form should be stamped and signed by the manufacturer)